
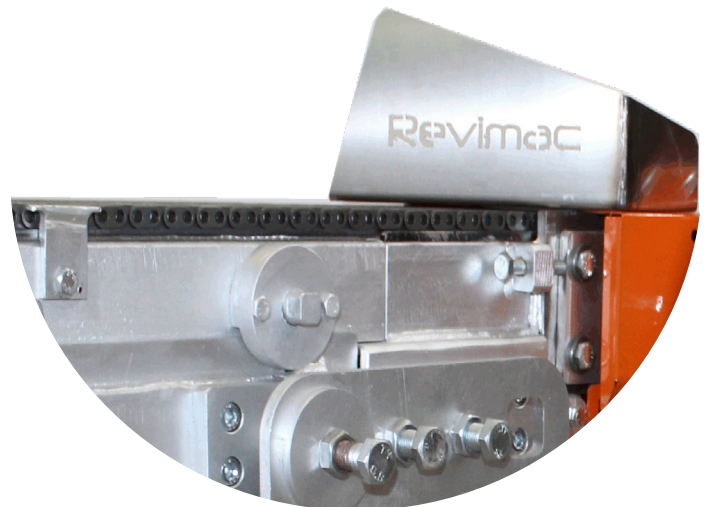


NEW

CROSS CONVEYOR RC-900

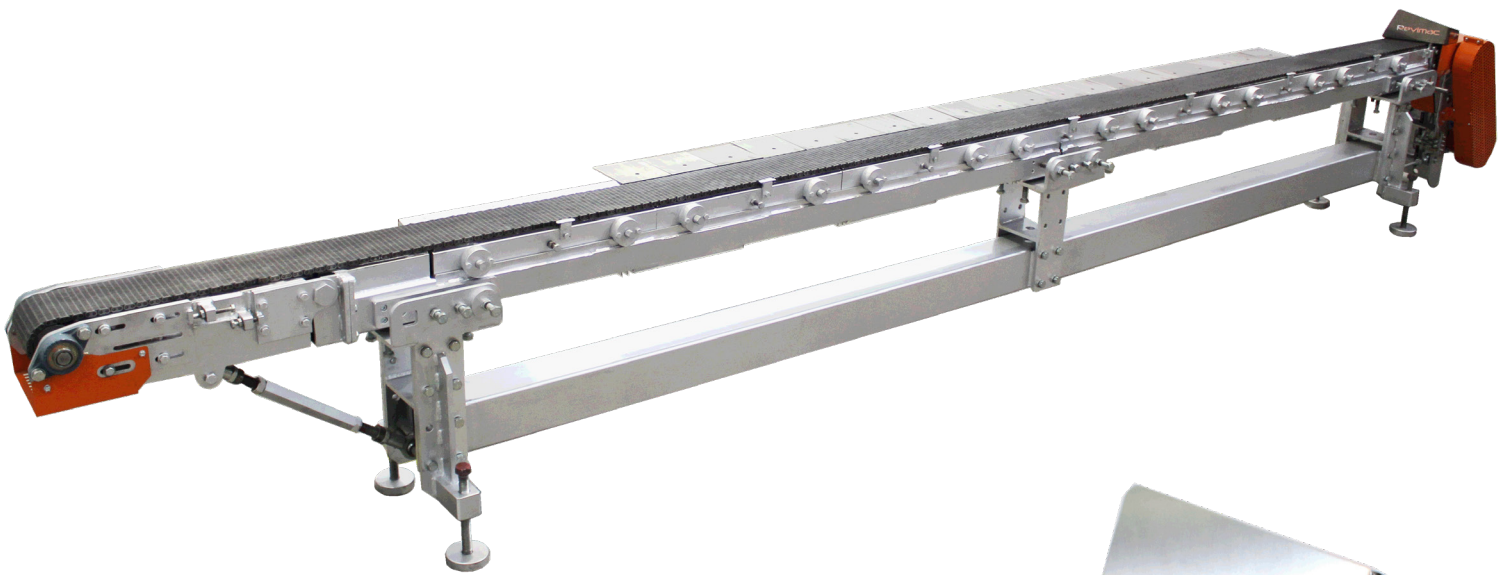

■ TECHNICAL FEATURES

- Tubular steel conveyor beam.
- Independently supported longitudinal beam adjustable in planarity and height.
- Floor supports positioned each side of structure.
- Height adjustable supporting frame (standard range: from 850 to 1100 mm).
- Removable modular supports for belt guide with integrated transfer plate adjustment.
- Hinged head terminal to compensate height variation between conveyor drive and cross-conveyor.
- Drive motor in easily accessible position.
- Q.C. under-belt modular wear plates (600 mm long).
- Heavy duty stainless steel or cast iron adjustable dead plates.

■ RECOMMENDED

RAMSEY chain all guard FX with head protection.

■ OPTIONAL

Remote dead plates height and planarity adjustment.



REVIMAC SRL

Via Mario Carraro, 19 - 36075 Montecchio Maggiore - Vicenza - ITALY
ph. +39 0444 493494 + Fax +39 0444 492358
e-mail: revimac@revimac.com - www.revimac.com